



宁波星之航环保科技有限公司



COMPANY WEBSITE
<https://www.hl-water.net/>



MADE-IN-CHINA
<https://filter-cartridge.en.made-in-china.com>

Ningbo Xzh Environmental Technology Co.,Ltd

NO.98, YUDE ROAD, ERTANG INDUSTRIAL ZONE, ZONGHAN STREET, CIXI CITY, ZHEJIANG PROVINCE, CHINA

E-mail: xzh02@nb-xzh.com xzh03@nb-xzh.com xzh05@nb-xzh.com



Ningbo Xzh Environmental Technology Co.,Ltd

***The Professional Manufacturer
Which Care About Your Pure Water Needs***



Applicable:

Indoor appliance :Whole house filter system, integrated direct drinking machine, water filter, water dispenser, Coffee maker, Ice maker, Shower, Washing machine, Smart toilet

Outdoor equipment: Pitcher, Squeezing Bottle, Recreational Vehicles

- ✓ Offer you much fresh and pure drinking water
- ✓ Remove heavy metal ion
- ✓ Reduce water acid level
- ✓ Improve the activity of water
- ✓ Prolong the service life of electrical appliances

COMPANY PROFILE

HONORARY CERTIFICATE

Ningbo XZH Environmental Technology Co., Ltd established in 2009 is located in Ertang industrial Zone, Cixi city, Zhejiang Province, China. We are water filter manufacturer professional in water filter field than 12 years. And we are OEM factory. All product support to customization. Product positioning in the high-end market. We always insist on the principle "Quality first and Reputation highest!"

Our factory purchase department with the professional suppliers manager system. Automatic machine strictly check raw material: Granular carbon's Iodine adsorption $\geq 1100\text{mg/g}$; Granular carbon & carbon rod material with NSF certificate; UF membrane with FDA certificate Density of UF membrane: 0.001-0.002 Micron;

We apply the advanced equipment to the production to achieve effective assembly and inspection. We also equip inspector in each process. So our products are superior in good filtration, leak-proof and high-pressure resistance. Our company strictly comply with ISO 9001:2008 standard, international quality control system and gain the permission of the Health Authority and pass the quality test.

We sincerely welcome domestic and overseas customers to cooperate with us to create a long-term and double-win relationship with you.



How high-quality water is produced

Water breeds life and is an indispensable material resource for the survival and development of life. Water is the key to a high quality of life. The pollution of the environment, the deterioration of the water source, and the secondary pollution in the transportation process have led to the health concerns of those who require a high quality of life.



Why use high-quality water

When you decide what kind of water purifier to let into your kitchen, just as you decide what kind of water to let into your life, you have a high quality of life with Star Air Commercial filters.

Appearance Design



The combination of high technology and sparkling exterior design inside the XZH commercial filter makes it no less impressive or even a highlight in any high-end kitchen equipment.

For discerning chefs, the XZH Commercial filter is the perfect drinking water system.

- Designed to meet the demanding standards of the food industry, Star Air filtration systems are efficient, safe and reliable;
- The personalized exterior design is not only very durable but also full of charm;

Core technology

1.The unique filter element production process can be flexibly matched according to different user groups to improve the product.The utilization rate, greatly saving the cost of use for customers. The product's unique antibacterial ingredients can effectively remove the dirt in the water.Stains and various bacteria.

2.Application of carbon fiber material: Carbon fiber filter element is a composite deep filtration structure composed of cellulose and activated carbon powder.Combined with the dual-function filter material structure of activated carbon adsorption, the outer column of the filter element is a precision fiber filter material package.Coated with inner lining, surrounded by activated carbon fiber cloth forming;When the liquid flows through the filter, the outer layer of the deep fiber filter structure.It can block pollution particles, and the activated carbon in the filter cloth can remove odor, odor, sediment, pigment, and swing in the filtrate.Organic compounds (VOCs) and organic chemicals; The innermost layer of fiber filter material can prevent carbon particles and.The discharge of small pollutants can provide the final quality assurance and complete filtration treatment of the filtrate. Carbon fiber material has.The fine pore structure and large specific surface area can effectively capture and remove particles and impurities in liquids or gases;Excellent chemical stability and corrosion resistance, able to maintain stability in a variety of strong acids, strong bases and organic solvents; simultaneous.With excellent mechanical strength and rigidity, it can maintain stable filtration performance under high pressure and high flow conditions.

3.Pleated PP cartridge: Low resistance of the folding filter element: the filter element adopts a folding structure, and the filter area is higher than that of the ordinary filter element.Large, small resistance when the water flows through, fast water flow speed, better filtration effect, long service life: PP folding filter element.Made of high quality polypropylene material, with corrosion resistance, high temperature resistance and other characteristics, long service life, not easy to deformation, not Easy to clog.

4.Small size, high flow rate, large processing capacity, strong safety, multi-function (Bacteria removal, lead removal, VOC removal, special organic matter removal, etc.)

We can customize reasonable solutions according to the needs of customers and provide them with more reasonable, better, and safer water. This is precisely why many catering service providers rely on us to help them solve water related problems.

The quality of drinks

- Coffee: Better extraction, less odor
- Iced tea drink: No dirt, clear taste
- Drinking water: Adsorbed residual chlorine, good taste, safer
- Ice: Hard, crystal clear
- Hot tea drink: Better flavor extraction, more pure color

Sustainability

- Energy conservation: Hard water and scaling reduce energy efficiency and increase costs.
- Wastewater: By using an efficient RO system, food service providers can save more RO wastewater per year than regular RO equipment
- Recycling: Use food-grade plastic that can be recycled.
- Reduce waste: Eliminating bottled water and promoting on-site filtered tap water can reduce the number of discarded bottled water bottles.

Reduce equipment failures, Extend the service life of equipment

- Coffee machine: Reduce scaling of heating elements, reduce the failure of solenoid valves and water storage tanks
- Ice machine: reduce scaling, reduce the number of failures caused by freezing
- Steam oven: Reduce limestone, ensure stable cooking, reduce corrosion
- Dishwasher: Remove dirt from dishes and glassware to save energy



Feature

- Compact structure, easy installation, high reliability, complete configuration, hygiene and safety
- Rotating quick release filter element, high pressure resistance, easy installation and replacement, fast and hygienic
- Protecting equipment and extending lifespan
- Flexible selection of different sizes and functions according to user needs

Processing

- Special functional medium, effective removal of lead, VOC and effective inhibition of bacterial growth
- Multi-fold complex filtration technology filtration accuracy of 0.5 microns, can effectively remove particles and impurities, residual chlorine, odor and various harmful spores
- Effective absorption of odor, special micro-purification technology to bring spring-like taste, can effectively inhibit the growth of bacteria, microorganisms
- The scale inhibition performance is improved by dynamic ATC scale inhibition material
- High precision EFB folding membrane, precise trapping of bacteria, removal of coliform
- High mechanical strength, long service life

Applicable scenarios





Single water filtration system·DSS/A/PA

Application: Home water purification,coffee machine,ice maker,tea extractor,sparkling water maker,hot water boiler.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	8L/Min	Applicable water	Tap water
Capacity	125m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	386*112*133mm
Water temp.	5-38°C	Packing size(L*W*H)	410*280*157mm
Connect	3/8quick connect		



Single water filtration system·DSS/B/PA

Application: Home water purification,coffee machine,ice maker,tea extractor,sparkling water maker,hot water boiler.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	8L/Min	Applicable water	Tap water
Capacity	125m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	386*112*133mm
Water temp.	5-38°C	Packing size(L*W*H)	410*280*157mm
Connect	G1/2 external thread		



Single water filtration system·BSS/PA

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fried chicken burger shop and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler, rice steaming cabinet, commercial dishwasher and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	25L/Min	Applicable water	Tap water
Capacity	125m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	482*127*135mm
Water temp.	5-38°C	Packing size(L*W*H)	410*280*157mm
Connect	G1 internal thread		



Single water filtration system·CHS/A/PA

Application: Suitable for convenience stores, milk tea shops, coffee shops, cake shops, fried chicken burger shops and other places; Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	12L/Min	Applicable water	Tap water
Capacity	195m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	538*112*133mm
Water temp	5-38°C	Packing(L*W*H)	560*285*157mm
Connect	3/8 quick connect		



Single water filtration system·CHS/B/PA

Application: Suitable for convenience stores, milk tea shops, coffee shops, cake shops, fried chicken burger shops and other places; Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	12L/Min	Applicable water	Tap water
Capacity	195m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	538*112*133mm
Water temp	5-38°C	Packing(L*W*H)	560*285*157mm
Connect	G1/2 external thread		



Single water filtration system·AHS/PA

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fried chicken burger shop and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler, rice steaming cabinet, commercial dishwasher and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	30L/Min	Applicable water	Tap water
Capacity	195m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	634*127*135mm
Water temp.	5-38°C	Packing size(L*W*H)	560*285*157mm
Connect	G1 internal thread		



Double water filtration system·BSD/PA

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fried chicken burger shop and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler, rice steaming cabinet, commercial dishwasher and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	25L/Min	Applicable water	Tap water
Capacity	260m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	482*256*135mm
Water temp.	5-38°C	Packing size(L*W*H)	410*280*285mm
Connect	G1 internal thread		



Double water filtration system·AHD/PA

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fried chicken burger shop and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor, air dispenser, water boiler, rice steaming cabinet, commercial dishwasher and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter; Reduces residual chlorine,VOC and bacterial.

Flow rate	30L/Min	Applicable water	Tap water
Capacity	400m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40°C	Product size(H*W*D)	634*256*135mm
Water temp.	5-38°C	Packing size(L*W*H)	560*285*285mm
Connect	G1 internal thread		

There may be differences between the original factory data and the sanitary approval data due to different testing and evaluation methods.

Note: The recommended filter replacement cycle is based on certain municipal water supply conditions and use habits, due to the differences in municipal water quality, as well as the use of.The difference between household water consumption habits, the actual life of the filter element may be different from the recommended replacement cycle.

There may be differences between the original factory data and the sanitary approval data due to different testing and evaluation methods.


Note: The recommended filter replacement cycle is based on certain municipal water supply conditions and use habits, due to the differences in municipal water quality, as well as the use of.The difference between household water consumption habits, the actual life of the filter element may be different from the recommended replacement cycle.

ATC Scale Inhibition

Salt-free scale filter material prevents the formation of scale through transformation and dissolution, Calcium magnesium ions with high hardness (Ca^{2+} , Mg^{2+}) catalyzed by filter media, into harmless, non-adhesive microscopic crystals, These crystals just stay suspended in water, Instead of being attached to plumbing systems and all kinds of equipment, It will not stick to the surface of the heater and form scale deposits, Thus, the scale inhibition effect is achieved, and the scale inhibition rate is as high as 97%. And retain beneficial calcium and magnesium ions after conversion, health and environmental protection.




Schematic diagram of spiral flow

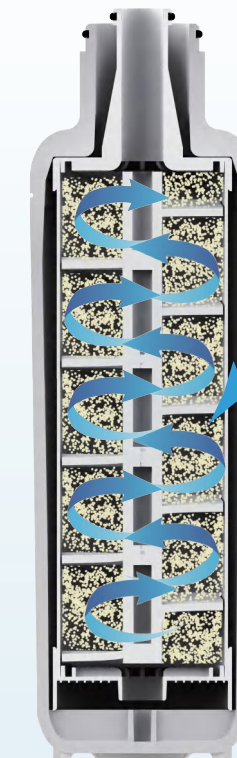

The spiral flow channel is designed to increase effectively. The contact time between water and scale inhibitor material is reached. Optimal scale inhibition effect.

Schematic Diagram

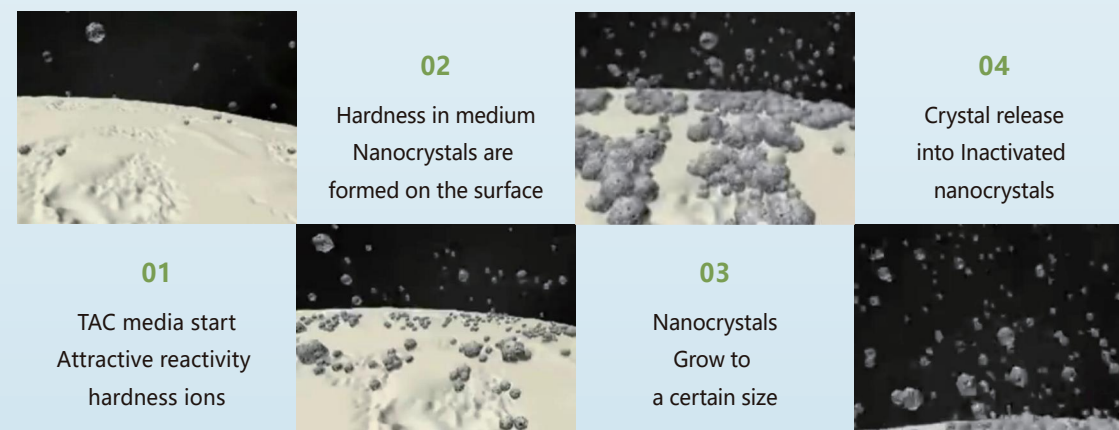

- Low Maintenance, long lasting media
- No salt or other regenerants required.
- No water waste from backwashing.
- No control valve or electricity required.

- Stability performance
- Mineral retention
- Suitable for residential and commercial
- Compact system, smaller size, suitable for small space.

FOOD SERVICE

- Coffee & Tea Brewers
- Espresso Machines
- Steamers & Proofers
- Dishwashing



COMMERCIAL & INDUSTRIAL

- Car Washes
- Laundries
- Evaporative Coolers (Single-Pass)
- Hotels, Hospitals, Apartments



Single scale inhibition water filtration system ·CHS/A/PAT

Application: Suitable for household water purification, milk tea shops, coffee shops, cake shops, fried chicken burger shops and other places;coffee machine, ice machine, tea extractor, sparkling water maker, water boiler, rice steaming cabinet and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	12L/Min	Applicable water	Tap water
Capacity	130m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	538*112*133mm
Water temp.	5-38℃	Packing size(L*W*H)	560*285*157mm
Connect	3/8 quick connect		



Single scale inhibition water filtration system·CHS/B/PAT

Application: Suitable for household water purification, milk tea shops, coffee shops, cake shops, fried chicken burger shops and other places;coffee machine, ice machine, tea extractor, sparkling water maker, water boiler, rice steaming cabinet and other equipment.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	12L/Min	Applicable water	Tap water
Capacity	130m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	538*112*133mm
Water temp.	5-38℃	Packing size(L*W*H)	560*285*157mm
Connect	G1/2G1/2 external thread		



Single scale inhibition water filtration system·AHS/PAT

Application: Suitable for household water purification, milk tea shops, coffee shops, cake shops, fried chicken burger shops and other places;coffee machine, ice machine, tea extractor, sparkling water maker, water boiler, rice steaming cabinet and commercial dishwasher.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water. .

Flow rate	30L/Min	Applicable water	Tap water
Capacity	130m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	634*127*135mm
Water temp.	5-38℃	Packing size(L*W*H)	560*285*157mm
Connect	G1 internal thread		



Double scale inhibition water filtration system·BSD/PAT

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fast food chain, fried chicken burger shop, dry cleaners and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor,sparkling water maker, water boiler, rice steaming cabinet, commercial dishwasher.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	25L/Min	Applicable water	Tap water
Capacity	400m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	482*256*135mm
Water temp.	5-38℃	Packing size(L*W*H)	410*280*285mm
Connect	G1 internal thread		



Double scale inhibition water filtration system·AHD/PAT

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fast food chain, fried chicken burger shop, dry cleaners and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor,sparkling water maker, water boiler, rice steaming cabinet, commercial dishwasher.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	30L/Min	Applicable water	Tap water
Capacity	195m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	634*256*135mm
Water temp.	5-38℃	Packing size(L*W*H)	560*285*285mm
Connect	G1 internal thread		



Triple scale inhibition water filtration system·BST/PAT

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fast food chain, fried chicken burger shop, dry cleaners and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor,sparkling water maker, water boiler, rice steaming cabinet, commercial dishwasher.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	25L/Min	Applicable water	Tap water
Capacity	400m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	482*385*135mm
Water temp.	5-38℃	Packing size(L*W*H)	410*280*415mm
Connect	G1 internal thread		



Triple scale inhibition water filtration system·AHT/PAT

Application: Suitable for whole-house filtration, milk tea shop, coffee shop, convenience store, cake shop, fast food chain, fried chicken burger shop, dry cleaners and other places. Meet the water supply needs of coffee machine, ice machine, tea extractor,sparkling water maker, water boiler, rice steaming cabinet, commercial dishwasher.

Function: Reduces sediment ,rust,red worms and other large particles of organic matter;Reduces residual chlorine,VOC and bacterial. Effectively inhibit scale formation and retain beneficial minerals in water.

Flow rate	30L/Min	Applicable water	Tap water
Capacity	400m ³	Water pressure	0.172~0.862Mpa
Temperature	4-40℃	Product size(H*W*D)	634*385*135mm
Water temp.	5-38℃	Packing size(L*W*H)	560*285*415mm
Connect	G1 internal thread		

There may be differences between the original factory data and the sanitary approval data due to different testing and evaluation methods.

Note: The recommended filter replacement cycle is based on certain municipal water supply conditions and use habits, due to the differences in municipal water quality, as well as the use of.The difference between household water consumption habits, the actual life of the filter element may be different from the recommended replacement cycle.

There may be differences between the original factory data and the sanitary approval data due to different testing and evaluation methods.

Note: The recommended filter replacement cycle is based on certain municipal water supply conditions and use habits, due to the differences in municipal water quality, as well as the use of.The difference between household water consumption habits, the actual life of the filter element may be different from the recommended replacement cycle.



1: Certificates:

- ☆ Granular carbon & carbon rod material with NSF certificate
- ☆ UF membrane with FDA certificate

2: Advantages(We are factory):

- ☆ Strict material control system: Cartridge housing without fluorescer, superior quality internal filter material.
- ☆ Iodine adsorption $\geq 1100\text{mg/g}$
- ☆ Density of UF membrane: 0.001-0.002 Micron, fully automatic inspection
- ☆ Inspection: Burst pressure-2.8Mpa for 30s, Static pressure- 1.5Mpa for 30mins.
- ☆ Support: Professional labs, advanced production equipment and more than 12 years produce experience.

3: Packing(Free advertisement):

- ☆ OEM colorful box
- ☆ Laser print your logo on faucet base
- ☆ Print your company information and service Tel NO. on the PE tube.

4: Specification:

- ☆ Spare parts: You can change or deleted or add any spare parts if needed.
- ☆ Filter cartridge: You can change or deleted or add any kinds of filter cartridges if needed.
- ☆ Customizable filter cartridge: composite filter cartridge(at most 5 kinds of material in 1 filter cartridge) and Unique filter cartridge in the world are all available.



10K-2



10K-3



10K-4



10KB-3



11Q-3



11Q-4


Model NO.	Packing size	Loading Qty	Advantages
10K-2	14×15×36mm	20GP: 3700units 40HQ: 9000units	Unique replace filter cartridge, Helpful to retain your customers
10K-3	21×15×36mm	20GP: 2400units 40HQ: 6700units	Unique replace filter cartridge, Helpful to retain your customers
10K-4	24×15×36mm	20GP: 2150units 40HQ: 5250units	Unique replace filter cartridge, Helpful to retain your customers
10KB-3	24×15×36mm	20GP: 2150units 40HQ: 5250units	Unique replace filter cartridge, Helpful to retain your customers
11Q-3	22*12*36 cm	20GP: 2900units 40HQ: 6700units	1/4' tube replace filter cartridge, popular in the market
11Q-4	29*12*36 cm	20GP - 2200units 40HQ - 5100units	1/4' tube replace filter cartridge, popular in the market

REPLACE FILTER CARTRIDGE/ELEMENT




- Remove impurities and pollutants
- Filter custom combination
- Remove suspended substances, larger bacteria, escherchia coli, etc
- Prolong the service life of electrical appliances
- Absorb and remove residual chlorine
- Replacement cartridge


Dec	Model	Service period	Function
Sediment Filter	PP	3-6 month	1-5μm Remove impurities and pollutants such as rust, sand grains and earth in the water.
Granular Carbon Filter	GAC / UDF / T33 Pre-Carbon filter Post-Carbon filter	6-9month	Iodine adsorption: ≥1100 mg/g Absorb and remove residual chlorine, disinfecting by product, organic chemical substance,etc.
Carbon Rod Filter	CTO Pre-Carbon filter Post-Carbon filter	12-18 month	Escherichia coli and Staphylococcus removal rate can reach ≥99%, turbidity removal rate can reach ≥95% Effectively remove organic matter, particles, rust, chlorine ion, Staphylococcus, peculiar smell,etc.
Ultrafiltration Membrane	UF	12-18month	0.001-0.002 micron, Fully automatic inspection ultrafiltration membrane (material is PES) has effective function to remove coarser particles, sludge, colloid, suspended substances, organic matter, some heavy metals, larger bacteria, rust, colloid and organic matter in water.
Reverse Osmosis Membrane	RO	Around 24 month	0.0001 micron, Fully automatic inspection Remove heavy metal, Bacteria, Arsenic, Chlorine, Cadmium, Giardia, Viruses, Cyanide, other organic chemical substances or foreign substances with molecular weight greater than 200, so that the complete machine exerts a perfect purification effect.
Medical stone	Medical stone	9-12 month	Effect.Improve the activity of water. Absorb the harmful substances in the water, Effectively absorb the heavy metal ions such as Pb, Hg, Cr, Cd, As and Organic matter, germs and other toxic and harmful substances, The adsorption rate of heavy metal can reach ≥96%, and ≥93% for escherchia coli.
Granular Carbon Filter	Odor reduce & Taste improve	12-15 month	Iodine adsorption: ≥1100 mg/g Absorb and remove residual chlorine, disinfecting byproduct, organic chemical substance. Remove the peculiar smell in the water to restore the fresh taste.
Sediment and carbon	Composite Filter	12-15 month	Remove impurities and pollutants such as rust, sand grains and earth in the water.Absorb and remove residual chlorine, disinfecting byproduct, organic chemical substance,etc.
Carbon and Ultrafiltration	Composite Filter	12-18 month	Absorb and remove residual chlorine, disinfecting byproduct, organic chemical substance,suspended substances, larger bacteria, escherchia coli, etc.
Sediment + Ultrafiltration	Composite Filter	12-18 month	Remove impurities and pollutants such as rust, sand grains and earth in the water. Also including suspended substances, larger bacteria, escherchia coli, etc
Alkaline Filter	Alkaline Filter	9-12 month	Reduce the water acid level. Produce negative potential water, Which helps to remove excess free radicals in the human body, and achieves the effects of anti-oxidation, beauty and skin care, and immunity.
Anti Scale Filter	FOF	9-12 month	Change the structure of calcium and magnesium ions in water to prevent the formation of scale. Protect the solenoid valve and prolong the service life of electrical appliances

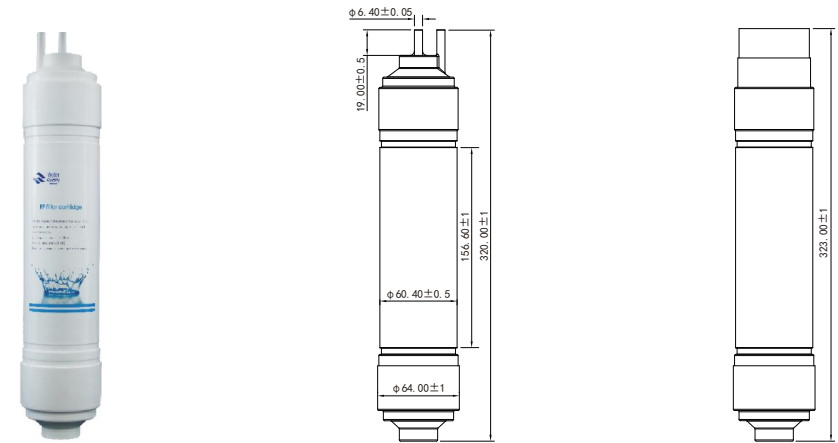

Product Name	13 Inch U Type Quick Connect Filter Cartridge
Packing size(CM)	52*34.5*33.5
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"



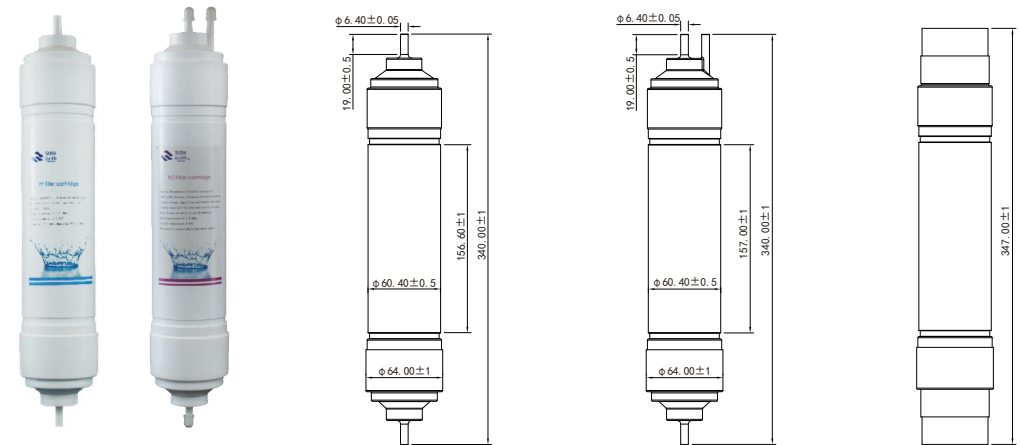


Product Name	13 Inch I Type Quick Connect Filter Cartridge
Packing size(CM)	52*36.5*33.5
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"


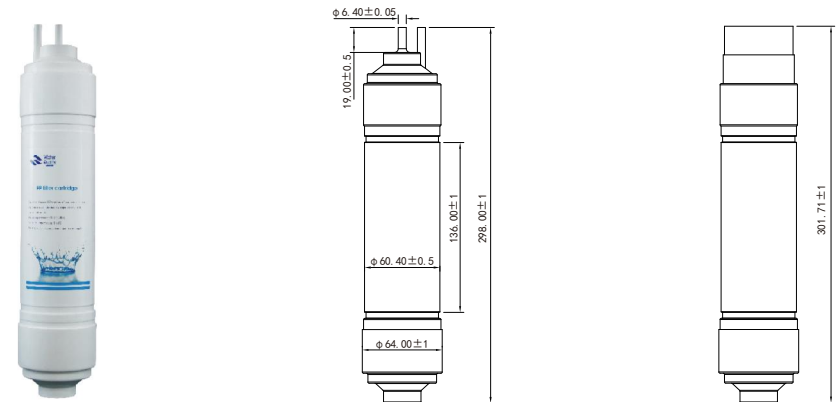


Product Name	11 Inch U Type Quick Connect Filter Cartridge
Packing size(CM)	52*31.3*32.8
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"






WATER FILTER CARTRIDGE

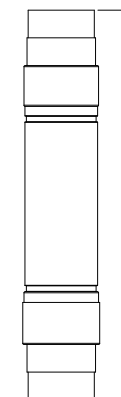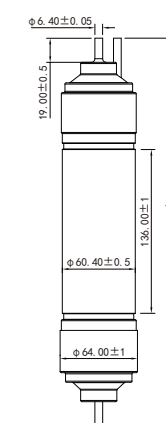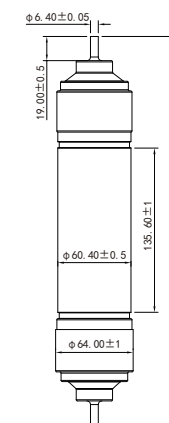

Product Name	11 Inch I Type Quick Connect Filter Cartridge
Packing size(CM)	52*34.5*33.5
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"

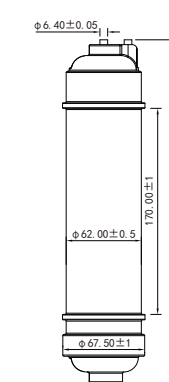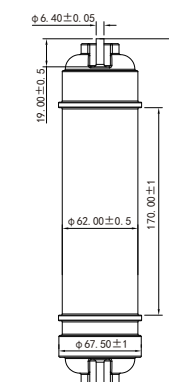

Product Name	10 Inch I Type Quick Connect Filter Cartridge
Packing size(CM)	55*29*35
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"

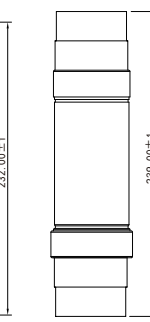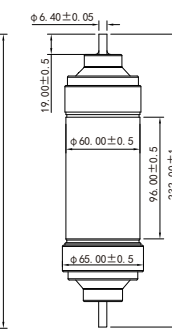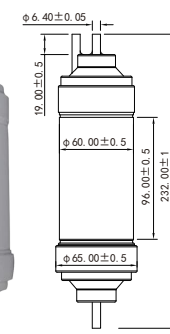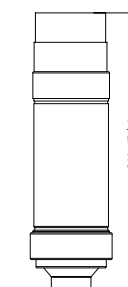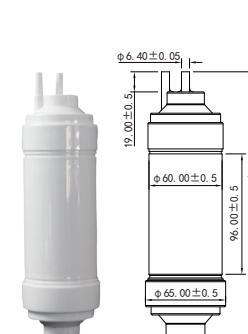


Product Name	6 Inch U Type Quick Connect Filter Cartridge	6 Inch I Type Quick Connect Filter Cartridge
Packing size(CM)	52*23.5*33.5	52*26*33.5
Packing qty	40pcs/ctn	40pcs/ctn




Product Name	5 Inch Bayonet Connect Filter Cartridge
Packing size(CM)	56*35*19
Packing qty	40pcs/ctn



Product Name	10 Inch Bayonet Connect Filter Cartridge
Packing size(CM)	56*34.5*31.5
Packing qty	40pcs/ctn

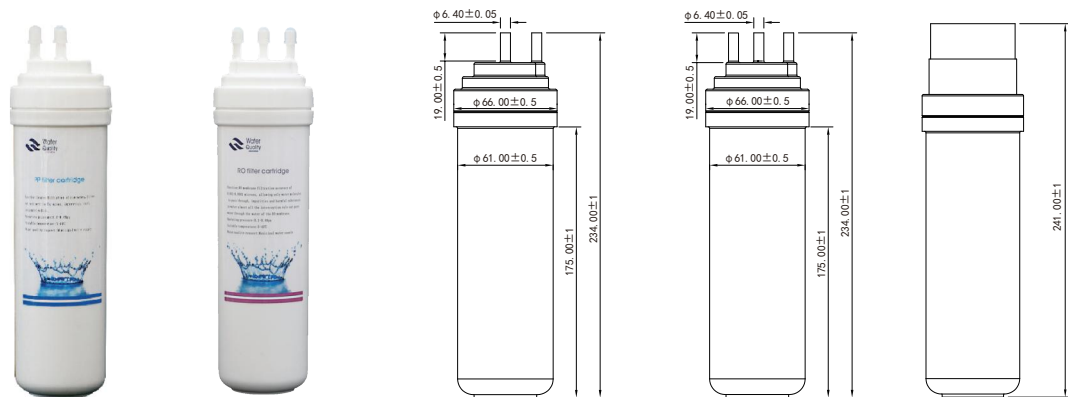


Product Name	8 Inch U Type Quick Connect Filter Cartridge
Packing size(CM)	41*26*34.5
Packing qty	40pcs/ctn
Connect	1/4"

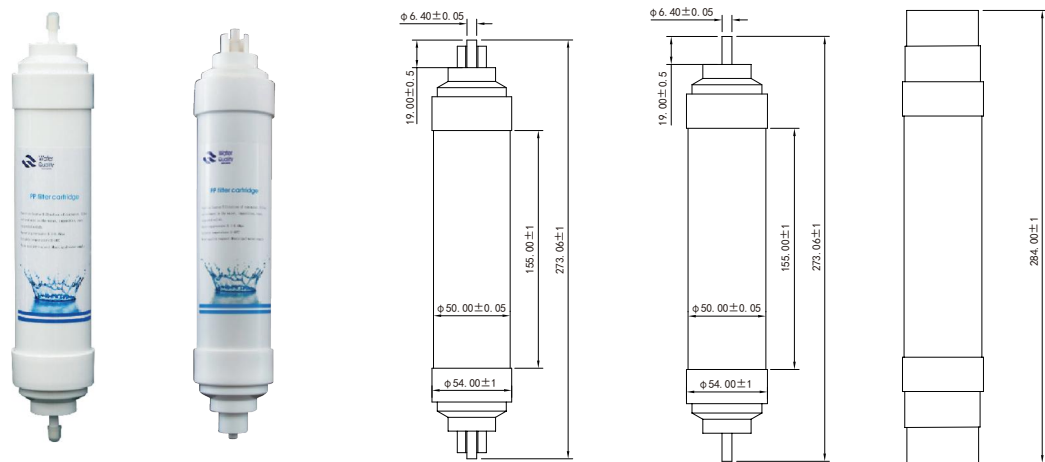

Product Name	8 Inch I Type Quick Connect Filter Cartridge
Packing size(CM)	47.5*30.5*30.5
Packing qty	40pcs/ctn
Connect	1/4" , 3/8"



Model NO.	Material	Size	Thread
XZH-B001	5 micron PP	131×46mm	Inlet: 1/4" tube Outlet: 1/4" tube
XZH-B002	Anti Scale FOF	131×46mm	Inlet: 1/4" tube Outlet: 1/4" tube
XZH-B003	UF membrane	131×46mm	Inlet: 1/4" tube Outlet: 1/4" tube




Model NO.	Material	Size	Thread
XZH-C001	5 micron PP	134×46mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw
XZH-C002	Anti Scale FOF	134×46mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw
XZH-C003	UF membrane	134×46mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw
XZH-C004	5 micron PP	134×46mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw
XZH-C005	Anti Scale FOF	134×46mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw
XZH-C006	UF membrane	134×46mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw

Model NO.	Material	Size	Thread
XZH-D001	5 micron PP	131×46mm	Inlet: G1/2" internal screw Outlet: 1/4" tube
XZH-D002	Anti Scale FOF	131×46mm	Inlet: G1/2" internal screw Outlet: 1/4" tube
XZH-D003	UF membrane	131×46mm	Inlet: G1/2" internal screw Outlet: 1/4" tube

Model NO.	Material	Size	Thread
XZH-2E4	1-5 micron PP	127/84×50mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw
XZH-2E4	Anti Scale FOF	127/84×50mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw
XZH-3E4	1-5 micron PP	127/84×50mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw Raw water: G1/2" external screw
XZH-3E4	Anti Scale FOF	127/84×50mm	Inlet: G1/2" internal screw Outlet: G1/2" external screw Raw water: G1/2" external screw
XZH-2E6	1-5 micron PP	127/84×50mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw
XZH-2E6	Anti Scale FOF	127/84×50mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw
XZH-3E6	1-5 micron PP	127/84×50mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw Raw water: G1/2" external screw
XZH-3E6	Anti Scale FOF	127/84×50mm	Inlet: G3/4" internal screw Outlet: G3/4" external screw Raw water: G1/2" external screw


PRODUCT PROCEDURE

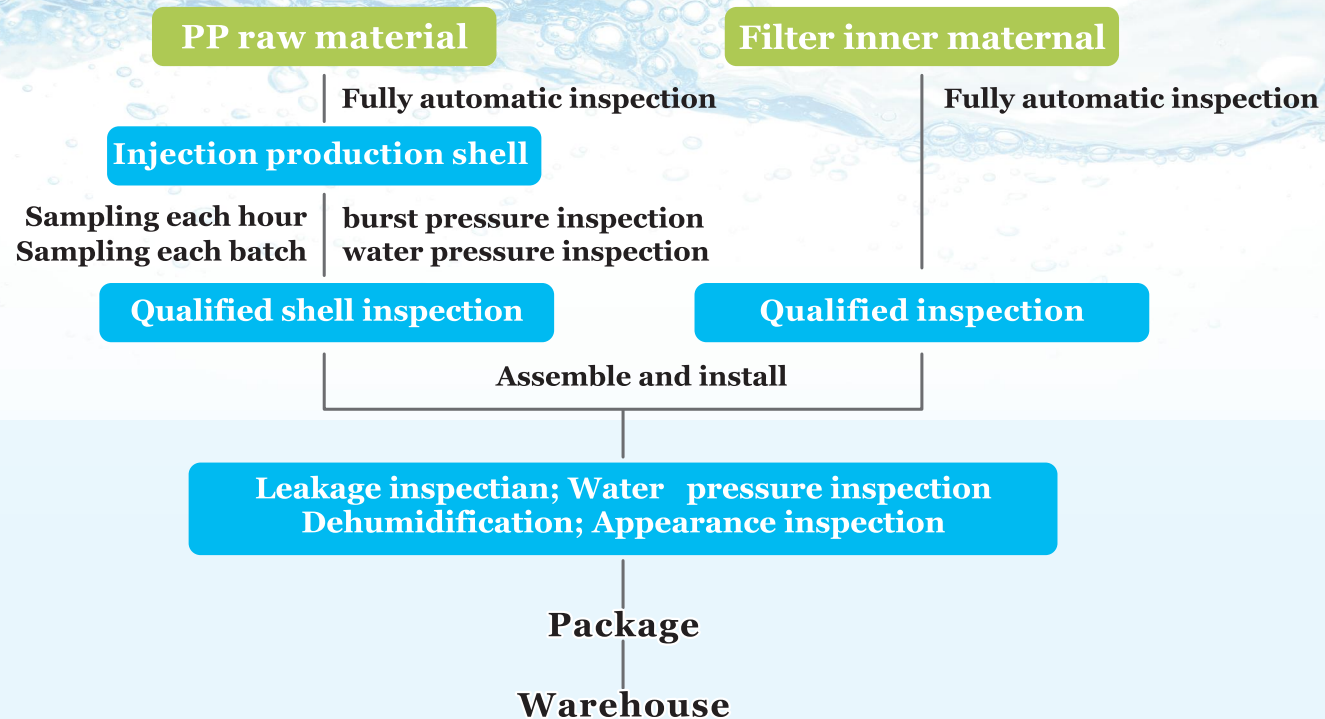

OUR FACTORY'S EQUIPMENT:



ORDER PROCESS:

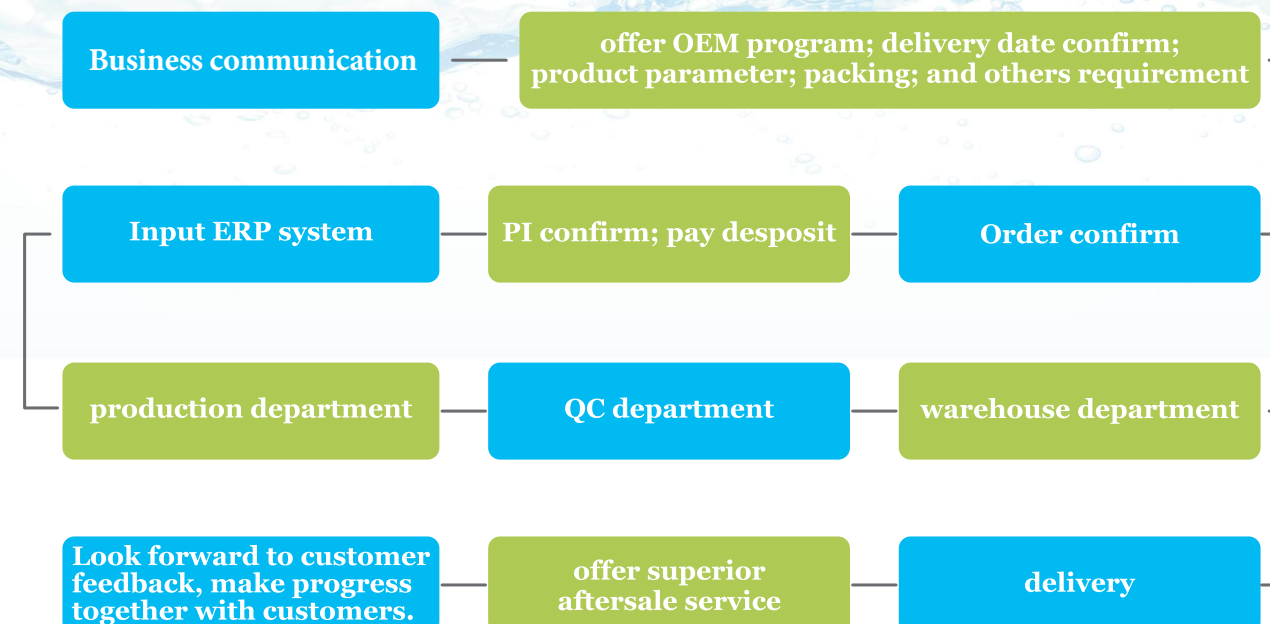

Diversified and flexible delivery methods

